

PCA[®] Slim[®] Spray SLC[®]

Faucet Attachment - 0.35 to 1.0 gpm

Pressure Compensating Regular Size M24x1



flow, stop and go[®]

Features and Benefits

- ▶ Smart lime build up cleaning with unique silicone bottom.
- ▶ Watercolours[®] design: Color coding to identify flow rate & stream pattern.
- ▶ Patented construction provides a splash-free, non-aerated spray.
- ▶ Pressure compensating for constant flow from 20 to 80 psi.
- ▶ Anti-clogging dome screen filters sediment and particles.
- ▶ With built-in M24x1 male threads to thread directly into the cavity of a traditional regular male aerator (no housing needed to connect).
- ▶ Vandal resistant by design (install and remove with a special key).
- ▶ Virtually invisible once installed.

Certifications

ANSI/NSF[®]-61-372 (pending)

ASME A112.18.1M and CSA B125 (pending)

Meets **CALGreen** requirements (0.35, 0.5, & 1.0 gpm)

WaterSense (1.0 gpm)



Technical Data

Materials: Body Acetal
 Tips Silicone
 Washer NBR
 O-ring EPDM

Continuous

Short-term (5 minutes max.)
 Per ASME A112.18.1 testing requirements.




Options Available


Part #	Color	gpm	L/min
18 016	Brown / Gray	0.35	1.3
18 017	Lime Green / Gray	0.5	1.9
18 018	Blue / Gray	1.0	3.8
11 913	Red Service Key		

Dimensions

Mounting Dimensions

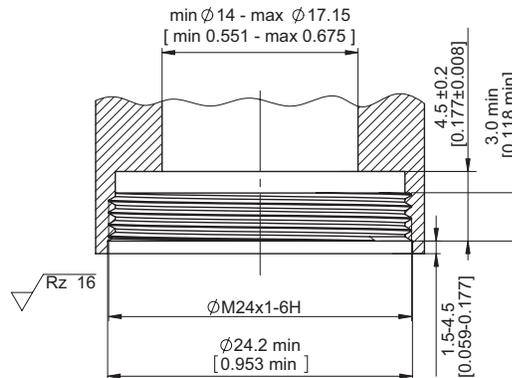

Aerator Dimensions

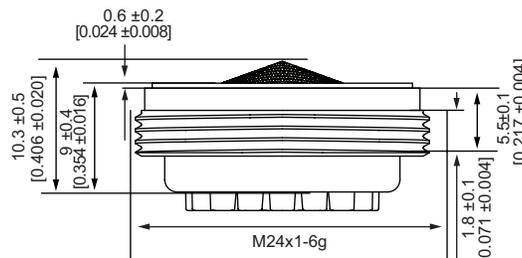

ATTENTION!

MAXIMUM MOUNTING TORQUE

1 Nm steadily applied

Refer to SAS-1 for further assembly instructions.