

# PCA<sup>®</sup> Slim<sup>®</sup> Spray SLC<sup>®</sup>

## Faucet Attachment - 0.35 to 1.0 gpm

Pressure Compensating Regular Size 15/16"-27



flow, stop and go<sup>®</sup>

### Features and Benefits

- ▶ Smart lime build up cleaning with unique silicone bottom.
- ▶ Watercolours<sup>®</sup> design: Color coding to identify flow rate & stream pattern.
- ▶ Patented construction provides a splash-free, non-aerated spray.
- ▶ Pressure compensating for constant flow from 20 to 80 psi.
- ▶ Anti-clogging dome screen filters sediment and particles.
- ▶ With built-in 15/16"-27 male threads to thread directly into the cavity of a traditional regular male aerator (no housing needed to connect).
- ▶ Vandal resistant by design (install and remove with a special key).
- ▶ Virtually invisible once installed.

### Certifications

ANSI/NSF<sup>®</sup>-61-372 (pending 0.35 gpm)  
ASME A112.18.1M and CSA B125

Meets **CALGreen** requirements (0.35, 0.5, & 1.0 gpm)

WaterSense (1.0 gpm)



### Technical Data

Materials: Body Acetal  
Tips Silicone  
Washer NBR  
O-ring EPDM

Continuous

Short-term (5 minutes max.)  
Per ASME A112.181 testing requirements.




### Options Available

Part #	Color	gpm	L/min
16 034	Brown / Gray	0.35	1.3
13 058	Lime Green / Gray	0.5	1.9
16 021	Blue / Gray	1.0	3.8
11 913	Red Service Key		


- Also available with M24 male threads

### Dimensions

#### Mounting Dimensions

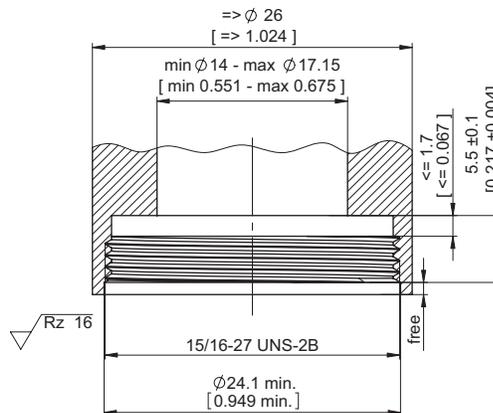

#### Aerator Dimensions

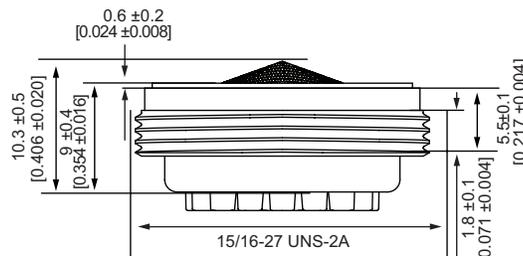

### ATTENTION!

MAXIMUM MOUNTING TORQUE

1 Nm steadily applied

Refer to SAS-1 for further assembly instructions.