

# PCA® Perlator®

## Faucet Aerator - 2.2 gpm max

### Pressure Compensating Junior Size



flow, stop and go®

#### Features and Benefits

- ▶ Watercolours® design: Color coding to identify flow rate and stream pattern.
- ▶ Patented construction provides a splash-free stream, well-aerated and soft to the touch.
- ▶ Pressure compensating for constant flow from 20 to 80 psi.
- ▶ Integrated anti-liming honeycomb replaces conventional wire mesh screens prone to lime buildup.
- ▶ Anti-clogging dome screen filters sediment and particles.
- ▶ Available housing finishes: chrome, polished brass and brushed nickel.
- ▶ Roll marked with statutory marks or laser for vandal proof housings.

#### Certifications

ANSI/NSF®-61-372 (11 278 pending)  
ASME A112.18.1M and CSA B125 (11 274, 11 278 pending)

#### Thread & Part Number

Part #	Designation	Thread Size
11 265	Insert only	
11 270	Junior male	13/16"-27
11 280	Junior female	3/4"-27
11 278	Junior dual thread	13/16"-27 X 3/4"-27
11 274	Vandal proof junior male	13/16"-27
11 284	Vandal proof junior female	3/4"-27
11 259	Vandal proof junior dual thread	13/16"-27 X 3/4"-27

Other product combinations available.



#### Packaging:

Inserts *1 pc (bag), 6 pcs (bag), 50 pcs (bag)*  
 Jr. male/female/dual thread *1 pc (bag), 6 pcs (tube), 50 pcs (tray)*  
 Jr. vandal proof dual thread *1 pc (bag), 6 pcs (clamshell), 50 pcs (tray)*  
 Jr. vandal proof male/female *1 pc (bag), 6 pcs (tube), 50 pcs (tray)*

#### Color Code

Dome	Flow Regulator	Basket
Natural	Yellow	Dark Gray

#### Flow Rate Curve

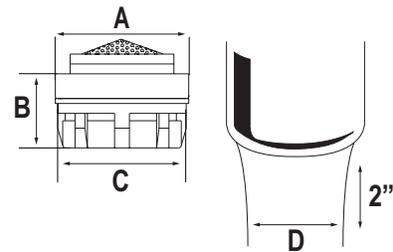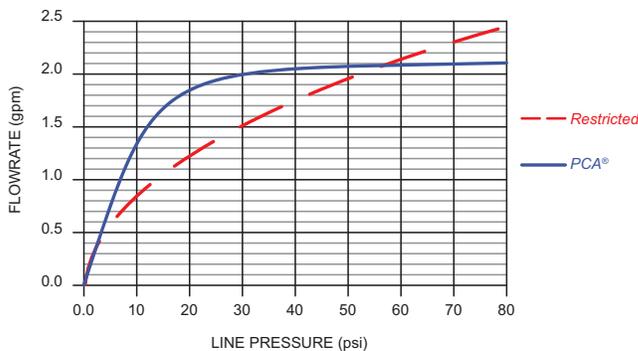

#### Dimensions

No	mm	In
A	18.20	.717
B	10.21	.402
C	17.40	.685
D	≈ 11	≈ 7/16

#### Housings



#### Technical Data

Materials: Body Acetal  
 O-ring EPDM  
 Washer EPDM

#### Continuous



#### Short-term (5 minutes max.) Per ASME A112.18.1 testing requirements.

