

PCA® Caché® Perlator® Hidden Faucet Attachment

Laminar Stream - 1.0 to 1.8 gpm

Pressure Compensating Regular Size M24x1



flow, stop and go®

Features and Benefits

- ▶ Watercolours® design: Color coding to identify flow rate and stream pattern.
- ▶ Patented construction provides a splash-free, crystal clear (non-aerated) stream.
- ▶ Pressure compensating for constant flow from 20 to 80 psi.
- ▶ Anti-clogging dome screen filters sediment and particles.
- ▶ Threads directly into the faucet spout. Virtually invisible once installed.
- ▶ Vandal resistant by design (install and remove with a special key).


Certifications

ANSI/NSF®-61-372
 ASME A112.18.1M and CSA B125
 Meets **CALGreen** requirements
 WaterSense (1.0, 1.2, & 1.5 gpm)
 1.8 gpm not applicable for WaterSense
 Complies with CEC Amendment to CCR Title 20, section 1605.3 (1.2 & 1.8 gpm)



Technical Data

Materials: Body Acetal
 Int. O-ring EPDM
 Ext. O-ring Silicone

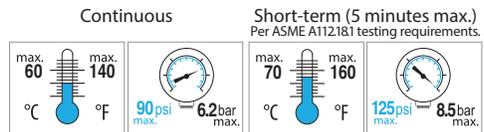

Options Available


Part #	Color	gpm	L/min
13 089	Blue / Light Gray	1.0	3.8
16 004	Pink / Light Gray	1.2	4.5
13 031	Green / Light Gray	1.5	5.7
13 091	Light Blue / Light Gray	1.8	6.6
11 906	Caché® Key (Gray)		

Packaging:


Threaded Insert 1 pc (bag), 6 pcs (bag), 50 pcs (bag)

Dimensions

Mounting Dimensions

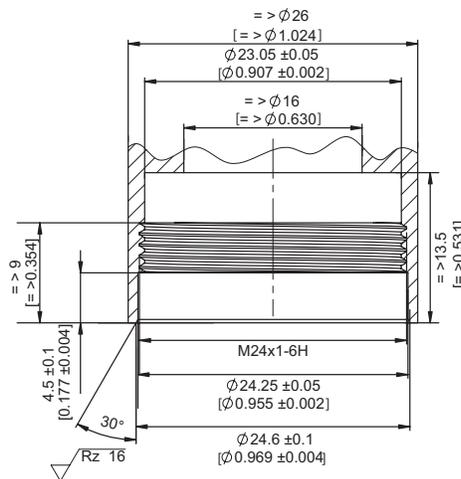

Dimensions

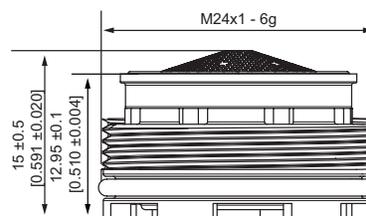

NEOPERL® Inc., Waterbury, CT • Tel: 203-756-8437 • Fax: 203-574-2107 • www.neoperl.com