




Equa-Flo HD Pressure Balancing Valve

For Individual, Econo-Walls, Wall Savers and Panelons Showers (2003 to Present)



BEST PLUMBING SPECIALTIES

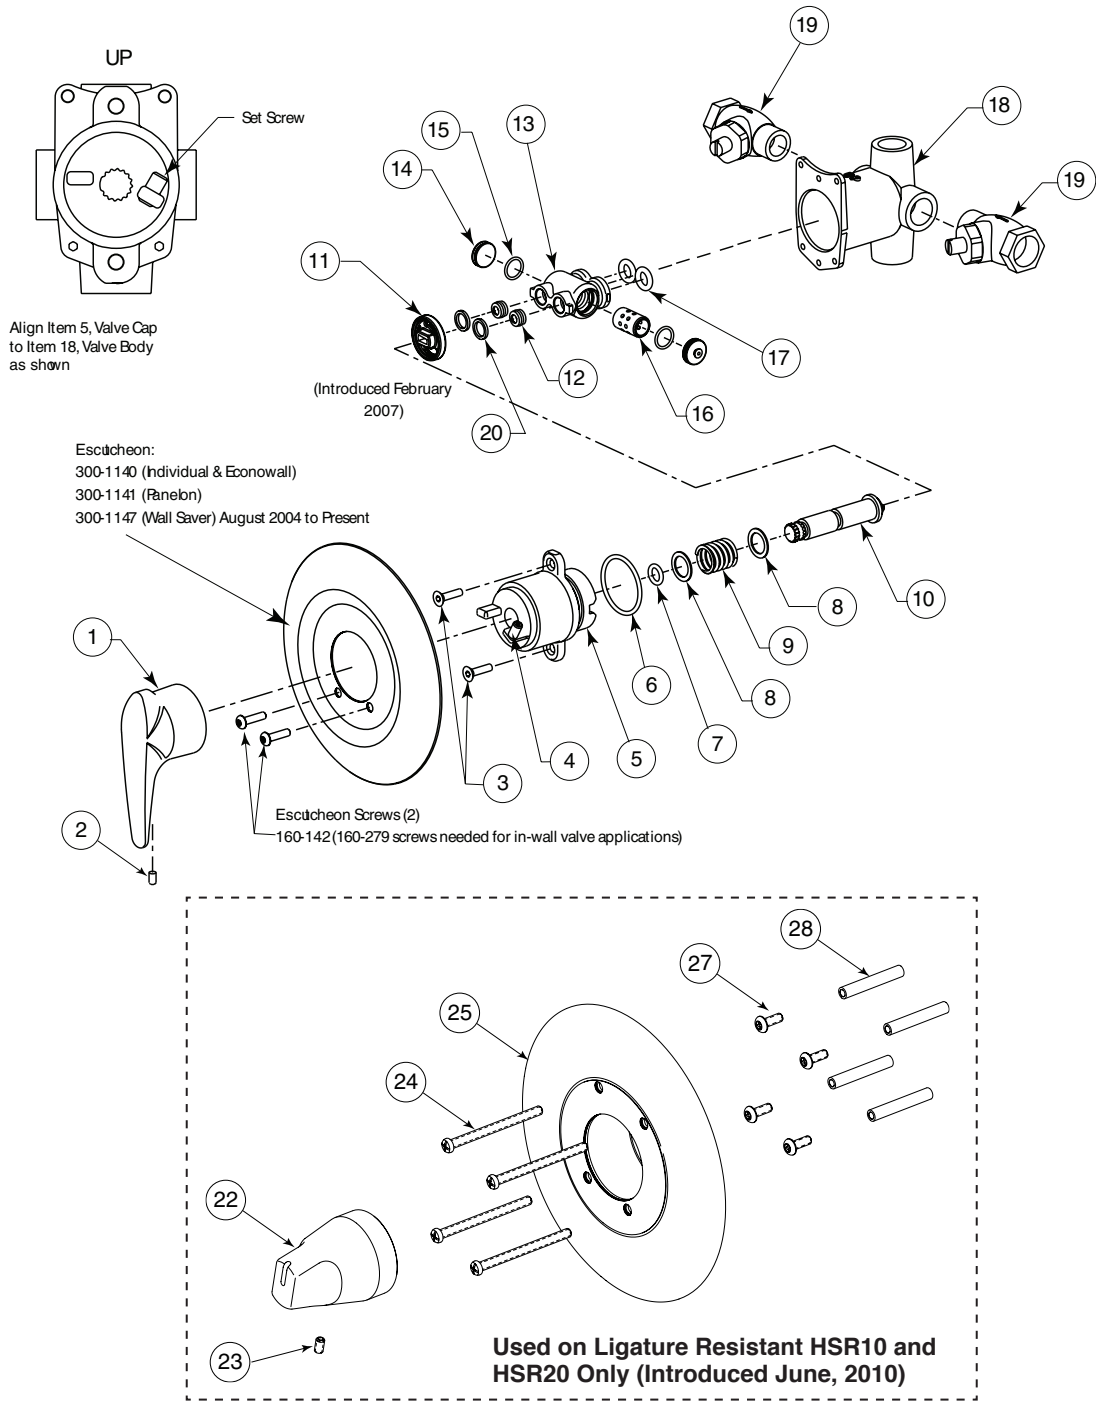

Valves are equipped with a temperature limit stop which can be used to limit the temperature of tempered water discharged. To adjust the temperature, remove the handle and adjust the set screw on the valve cap. Turn the set screw clockwise for COLDER setting and counterclockwise for WARMER setting.

NOTE: When replacing the double face seals, lubricate the top face with a small amount of lubricant when reassembling.

When assembling the valve cap into valve body, use lubricant on 125-154 O-ring to prevent twisting of O-ring.

If lubricant is not available, a slight film of soap may be used.

Item	Part No.	Description	Assembly	Cartridge Assembly S67-602S	Stem Assembly S21-076	Gasket Repair Kit S65-248	Cap/Stem Assembly S67-592
			Qty				
1	99045622	Handle	1	—	—	—	
2	99084356	Screw	1	—	—	—	
3	99101070	Screw	2	—	—	—	
4	99315264	Set Screw	1	—	—	—	1
5	99315265	Valve Cap	1	—	—	—	1
6	99315266	O-Ring	1	—	—	1	1
7	88082430	O-Ring	—	—	1	1	1
8	99713562	Washer	—	—	2	—	2
9	99921554	Spring	—	—	1	—	1
10	99315267	Stem	—	—	1	—	1
11	88082391	Rotor	1	—	—	—	
12	99260463	Double-Face Seal	—	2	—	2	
13	88082321	Cartridge Housing	—	1	—	—	
14	88083091	Retainer	—	2	—	—	
15	88082433	O-Ring	—	2	—	2	
16	99921556	Piston	—	1	—	—	
17	88082495	O-Ring	—	2	—	2	
18	99921558	Valve Body	1	—	—	—	
19	99092515	Stops (Optional)	2	—	—	—	
20	88082890	Washer	—	2	—	2	
21	88084686	Foam Rim Seal (not shown)	1	—	—	—	

Item	Part No.	Description	HSR10	HSR20
			Qty	
22	99921559	Handle, Ligature Resistant	1	1
23	99084356	Screw, 10-24 x 5/16" set	1	1
24	99713563	Screw, 10-24 x 2-1/2"	4	—
25	99713564	Escutcheon/Sleeve Assembly	1	1
26	99713565	Driver/Wrench (not shown)	1	—
27	88083226	Screw, 10-24 x 1/2"	—	4
28	99713566	Stand Off Screw	—	4
29	88082571	Pin In Hex Key (not shown)	—	1



BEST PLUMBING SPECIALTIES

800-448-6710 | www.bestplumbingspecialties.com