

Slim® PCA® Cascade® SLC® SSR Laminar Stream - 1.2 to 2.2 gpm Pressure Compensating Regular Size M24x1



flow, stop and go®

Features and Benefits

- ▶ Smart lime build up cleaning with unique silicone bottom.
- ▶ Adjustable bottom to angle the direction of your stream.
- ▶ Watercolours® design: Color coding to identify flow rate & stream pattern.
- ▶ Patented construction provides a splash-free, crystal clear (non-aerated) stream.
- ▶ Pressure compensating for constant flow from 20 to 80 psi.
- ▶ Anti-clogging dome screen filters sediment and particles.
- ▶ With built-in M24 male threads to thread directly into the cavity of a traditional M24 male aerator (no housing needed to connect).
- ▶ Vandal resistant by design (install and remove with a special key).
- ▶ Virtually invisible once installed.

Certifications

ANSI/NSF®-61-372 (pending 1.2, 1.5, & 2.2 gpm)

ASME A112.18.1M and CSA B125 (pending 1.2, 1.5, & 2.2 gpm)

Meets **CALGreen** requirements (1.2 & 1.5 gpm)



WaterSense (1.2 & 1.5 gpm pending)

Complies with CEC Amendment to CCR Title 20, section 1605.3 (1.2 gpm)

Options Available

Part #	Color	gpm	L/min
18 003	Pink / Gray	1.2	4.5
18 004	Green / Gray	1.5	5.7
18 005	Yellow / Gray	2.2	8.3
11 906	Gray Service Key		



Technical Data

Materials:	Body	Acetal
	Tips	Silicone
	Washer	NBR
	O-ring	EPDM


Continuous

Short-term (5 minutes max.)
Per ASME A112.181 testing requirements.




Dimensions

Mounting Dimensions

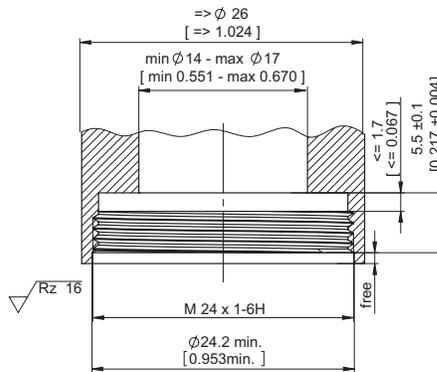

Aerator Dimensions

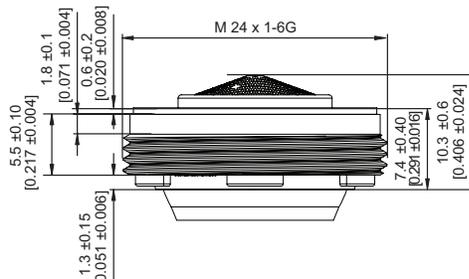

ATTENTION!

MAXIMUM MOUNTING TORQUE

1 Nm steadily applied

Refer to SAS-1 for further assembly instructions.