

# Perlator® Faucet Aerator - 1.5 gpm Flow Restricted Junior Size




flow, stop and go®

## Features and Benefits

- ▶ Watercolours® design: Color coding to identify flow rate and stream pattern.
- ▶ Patented construction provides a splash-free stream, well-aerated and soft to the touch.
- ▶ Integrated anti-liming honeycomb replaces conventional wire mesh screens prone to lime build up.
- ▶ Anti-clogging dome screen filters sediment and particles.
- ▶ Available housing finishes: chrome, polished brass, & brushed nickel.
- ▶ Roll marked with statutory marks or laser for vandal proof housings.

## Certifications

ANSI/NSF®-61-372 (10 678 pending)  
ASME A112.18.1M and CSA B125 (10 678 pending)  
Meets **CALGreen** requirements  
WaterSense

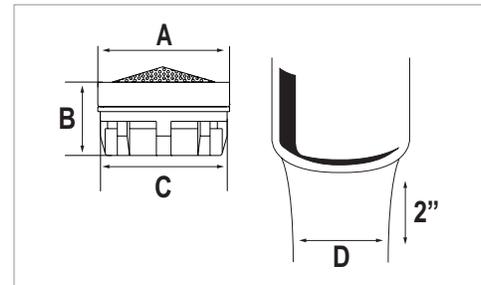

## Thread & Part Number

Part #	Designation	Thread Size
10 665	Insert only	
10 670	Junior male	13/16"-27
10 680	Junior female	3/4"-27
10 678	Junior dual thread	13/16"-27 x 3/4"-27
10 674	Vandal proof junior male	13/16"-27
10 684	Vandal proof junior female	3/4"-27
10 659	Vandal proof junior dual thread	13/16"-27 x 3/4"-27

Other product combinations available.


## Packaging:

Inserts	1 pc (bag), 6 pcs (bag), 50 pcs (bag)
Jr. male/female/dual thread	1 pc (bag), 6 pcs (tube), 50 pcs (tray)
Jr. vandal proof dual thread	1 pc (bag), 6 pcs (clamshell), 50 pcs (tray)
Jr. vandal proof male/female	1 pc (bag), 6 pcs (tube), 50 pcs (tray)

## Color Code

Dome	Ring	Basket
Green	White	Dark Gray

## Flow Rate Curve

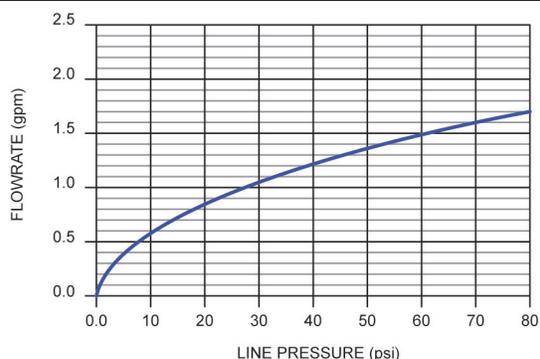

## Dimensions

No	mm	In
A	18.20	.717
B	10.21	.402
C	17.40	.685
D	≈ 11	≈ 7/16

## Housings



## Technical Data

Materials: Body Acetal  
Washer EPDM

Continuous

Short-term (5 minutes max.)  
Per ASME A112.18.1 testing requirements.

