

BubbleStream® Compact Single Swivel 1.8 - 2.2 gpm



flow, stop and go®

Features and Benefits

- ▶ Pull down action will switch aerated stream to powerful spray.
- ▶ Swivel action allows spraying of hard to reach areas of the sink.
- ▶ Will default back to stream when faucet is shut off.

Certifications


ANSI/NSF 61 (21 422 pending)
ASME A112.18.1M and CSA B125 (21 422, 20 722 pending)
Meets **CALGreen** requirements (1.8 gpm only)
WaterSense [See models below.]
Complies with CEC Amendment to CCR Title 20, section 1605.3 (1.8 gpm only)

Options Available


Part #	Color	gpm	PCA®	WaterSense
21 422	Black/chrome	1.8	no	no
21 424	Black/brushed nickel	1.8	no	no
20 722	Black/chrome	2.2	no	no
20 724	Black/brushed nickel	2.2	no	no



Dimensions

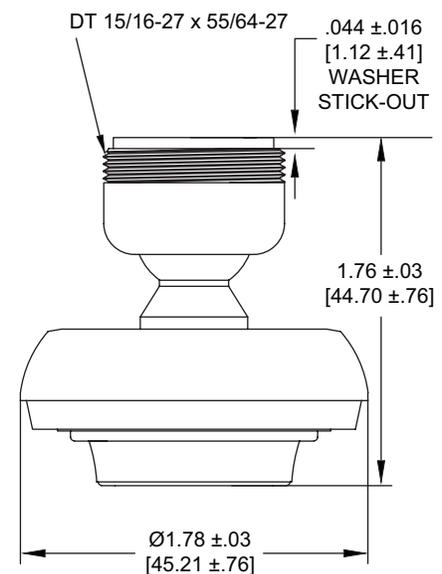

Flow Rate Curve

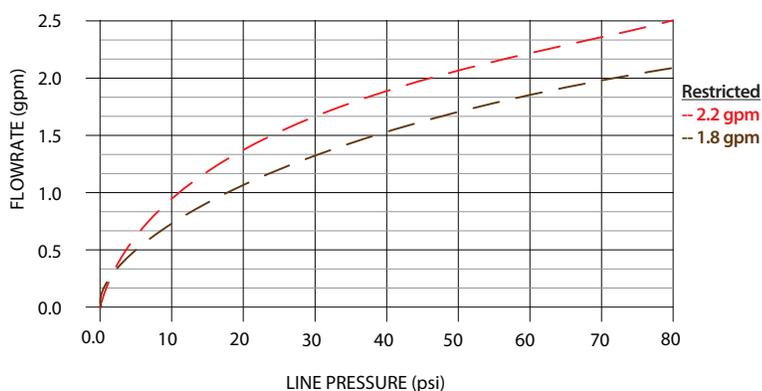


Technical Data

Materials: Body Acetal
Screen Stainless Steel
Washers EPDM
Outer body ABS
Connector Brass

Continuous

Short-term (5 minutes max.)
Per ASME A112.18.1 testing requirements.



NEOPERL® Inc., Waterbury, CT • Tel: 203-756-8437 • Fax: 203-574-2107 • www.neoperl.com