

# PCA® Mikado Spray Faucet Attachment - 0.5 gpm max Pressure Compensating Regular Size



flow, stop and go®

## Features and Benefits

- ▶ Distinguished stream with delicate lines and a unique spray pattern.
- ▶ Watercolours® design: Color coding to identify flow rate and stream pattern.
- ▶ Provides non-splashing, non-aerated spray.
- ▶ Pressure compensating for constant flow from 20 to 80 psi.
- ▶ Anti-clogging dome screen filters sediment and particles.
- ▶ Compatible with regular and vandal proof M22 & M24 metric housings.
- ▶ Available housing finishes: chrome, polished brass, brushed nickel and oil rubbed bronze.
- ▶ Laser marked housings with statutory marks.

## Certifications

ANSI/NSF®-61-372  
ASME A112.18.1M and CSA B125  
Meets **CALGreen** requirements

## Thread & Part Number

Part #	Designation	Thread Size
33 135	Insert only	
33 100	Regular male	15/16"-27
33 110	Regular female	55/64"-27
33 120	Regular dual thread	15/16"-27 x 55/64"-27
33 104	Vandal Proof Regular male	15/16"-27
33 114	Vandal Proof Regular female	55/64"-27
33 126	Vandal Proof Regular dual thread	15/16"-27 x 55/64"-27

Other product combinations available.



## Packaging:

Inserts 1 pc (bag), 6 pcs (bag), 50 pcs (bag)  
Reg. male/female/dual thread 1 pc (bag), 6 pcs (tube), 50 pcs (tray)  
Reg. vandal proof male/female/dual thread 1 pc (bag), 6 pcs (tube), 40 pcs (tray)

## Color Code

Dome	Flow Regulator	Basket
Natural	Lime Green	Dark Gray

## Flow Rate Curve

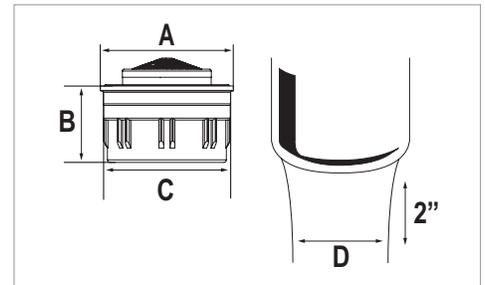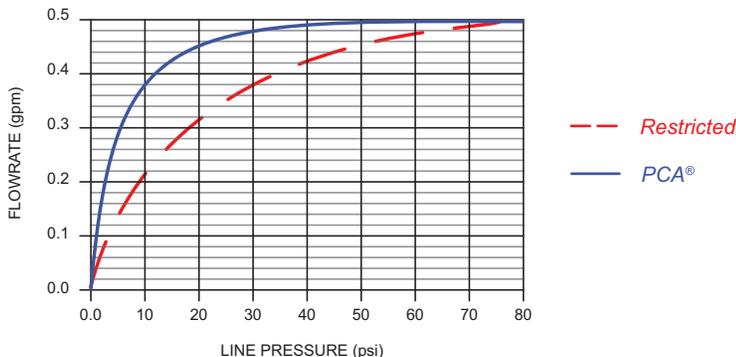

## Dimensions

No	mm	In
A	20.88	.822
B	12.00	.472
C	19.97	.786
D	≈ 25	≈ 1

## Housings



## Technical Data

Materials: Body Acetal/  
Stainless Steel  
O-ring EPDM  
Washer EPDM

Continuous

Short-term (5 minutes max.)  
Per ASME A112.18.1 testing requirements.

