

Perlator®

Faucet Aerator - 1.0 gpm

Flow Restricted Junior Size



flow, stop and go®

Features and Benefits

- ▶ Watercolours® design: Color coding to identify flow rate and stream pattern.
- ▶ Patented construction provides a splash-free stream, well-aerated and soft to the touch.
- ▶ Integrated anti-liming honeycomb replaces conventional wire mesh screens prone to lime build up.
- ▶ Anti-clogging dome screen filters sediment and particles.
- ▶ Available housing finishes: chrome, polished brass, & brushed nickel.
- ▶ Roll marked with statutory marks or laser for vandal proof housings.

Certifications

ANSI/NSF®-61-372
 ASME A112.18.1M and CSA B125
 Meets **CALGreen** requirements

Thread & Part Number

Part #	Designation	Thread Size
12 165	Insert only	
12 170	Junior male	13/16"-27
12 180	Junior female	3/4"-27
12 158	Junior dual thread	13/16"-27 x 3/4"-27
12 174	Vandal proof junior male	13/16"-27
12 184	Vandal proof junior female	3/4"-27

Other product combinations available.



Packaging:

Inserts *1 pc (bag), 6 pcs (bag), 50 pcs (bag)*
 Jr. male/female *1 pc (bag), 6 pcs (tube), 50 pcs (tray)*
 Jr. dual thread *1 pc (bag), 6 pcs (clamshell), 50 pcs (tray)*
 Jr. vandal proof male/female *1 pc (bag), 6 pcs (tube), 50 pcs (tray)*

Color Code

Dome	Diffuser	Basket
Ivory	Natural	Dark Gray

Flow Rate Curve

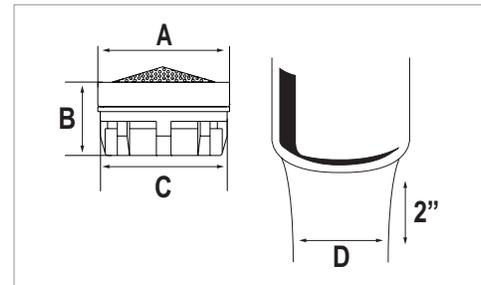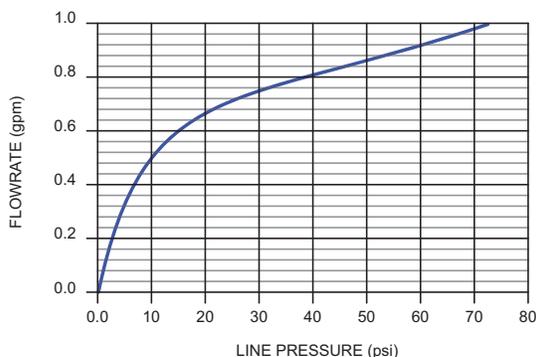

Dimensions

No	mm	In
A	18.20	.717
B	10.20	.402
C	17.40	.685
D	≈ 11	≈ 7/16

Housings



Technical Data

Materials: Body Acetal
 Washer EPDM

Continuous

Short-term (5 minutes max.)
 Per ASME A112.18.1 testing requirements.

