

PCA® Perlator®

Faucet Aerator - 1.5 gpm max

Pressure Compensating Tom Thumb® Size



flow, stop and go®

Features and Benefits

- ▶ Watercolours® design: Color coding to identify flow rate and stream pattern.
- ▶ Patented construction provides a splash-free stream, well-aerated and soft to the touch.
- ▶ Pressure compensating for constant flow from 20 to 80 psi.
- ▶ Integrated anti-liming honeycomb replaces conventional wire mesh screens prone to lime buildup.
- ▶ Anti-clogging dome screen filters sediment and particles.
- ▶ Available housing finish: chrome.
- ▶ Roll marked with statutory marks.

Certifications

ANSI/NSF®-61-372
ASME A112.18.1M and CSA B125
Meets **CALGreen** requirements
WaterSense



Thread & Part Number

Part #	Designation	Thread Size
11 195	Insert only	
11 196	Tom Thumb® male	M18x1
11 197	Tom Thumb® female	M16x1

Other product combinations available.



Packaging:

Inserts *1 pc (bag), 6 pcs (bag), 50 pcs (bag)*
Tom Thumb® male/female *1 pc (bag), 50 pcs (tray)*

Color Code

Dome	Flow Regulator	Basket
Clear	Green	Dark Gray

Flow Rate Curve

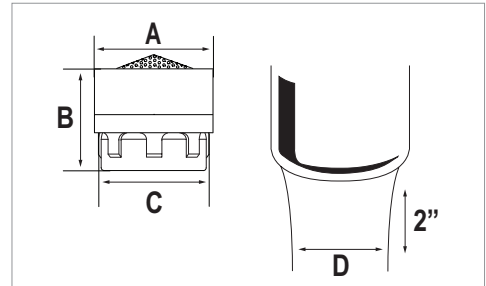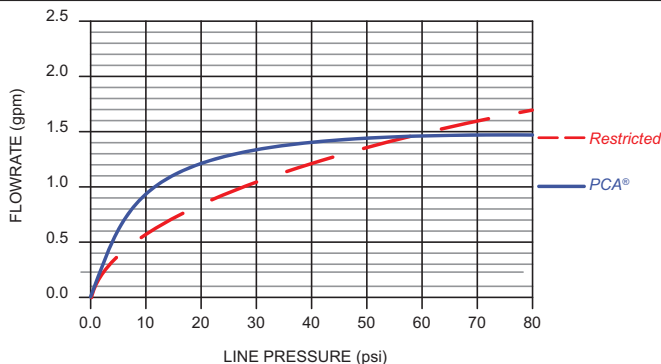

Dimensions

No	mm	In
A	15.00	.591
B	12.95	.510
C	14.05	.553
D	≈ 9	≈ 3/8

Housings







Technical Data

Materials: Body Acetal
O-ring EPDM
Washer NBR

Continuous

Short-term (5 minutes max.)
Per ASME A112.18.1 testing requirements.



NEOPERL, Inc., Waterbury, CT • Tel: 203-756-8437 • Fax: 203-574-2107 • www.neoperl.com