


Optima® 77016344 Faucet

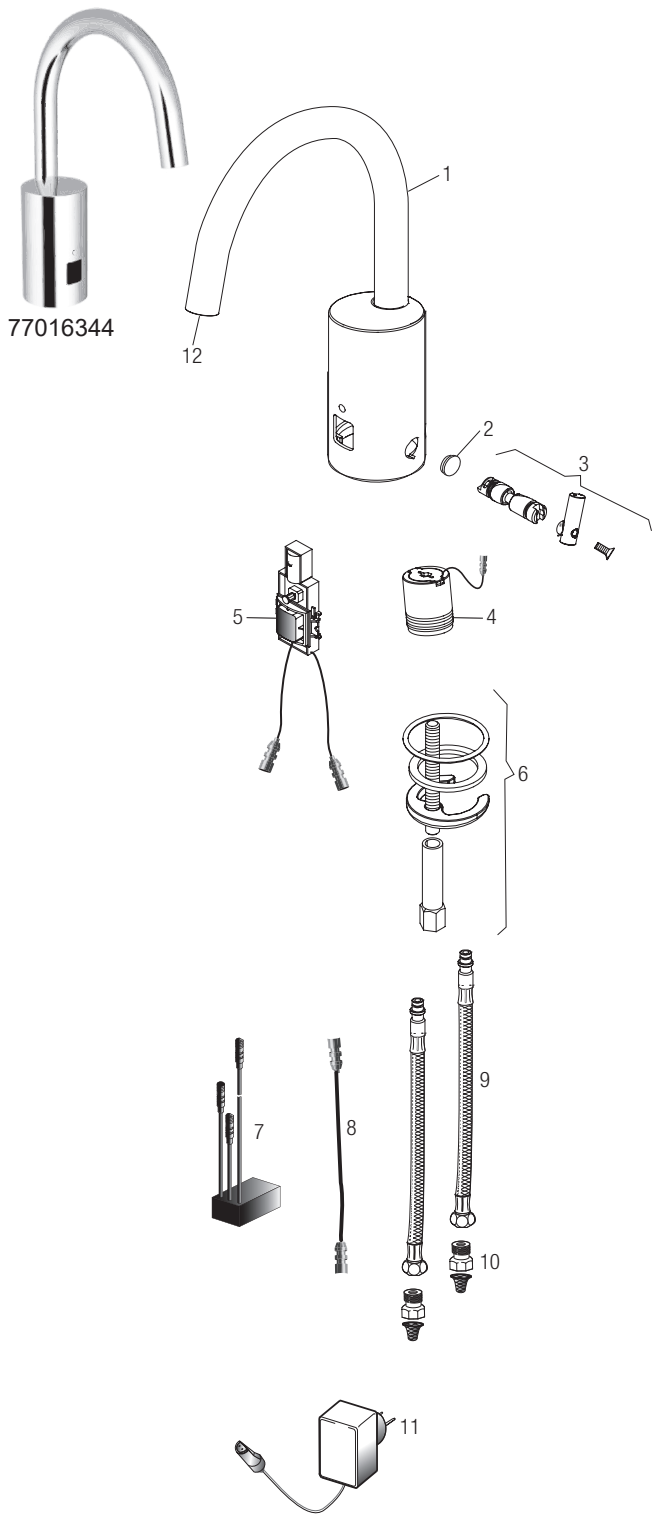


PARTS LIST—EAF-700 FAUCETS

Item	No.	Best No.	Description
1.	—	—	Spout Assembly
2.	99330471	—	Integral Side Mixer Handle Cap
3.	99310845	—	Integral Side Mixer Kit
4.	99044004	—	Solenoid
5.	99524522	—	Sensor Assembly
6.	99330459	—	Mounting Hardware
7.	99317485	—	Power Splitter
8.	88093276	—	11-13/16" (300 mm) Extension Cable
	88093277	—	47-1/4" (1200 mm) Extension Cable
	99289405	—	126" (3200 mm) Extension Cable
9.	99271632	—	13" (330 mm) Flexible Supply Hose (1)
10.	99310846	—	Filter/Strainer
11.	99330475	—	Plug-in Voltage Adapter, US Plug
12.	99123470	—	Multi-Lam Spray Head Kit 0.5 gpm (1.9 Lpm) Male Cache TJ
	99123471	—	Spray Head Kit 1.5 gpm (5.7 Lpm) Aerated Male Cache TJ
	99123472	—	Spray Head Kit 1.5 gpm (5.7 Lpm) Laminar Male Cache TJ

*Not Shown: SFP-11 4" Trimplate / SFP-22 8" Trimplate

Electrical Connection for up to Six (6) Faucets Using One (1) Adapter

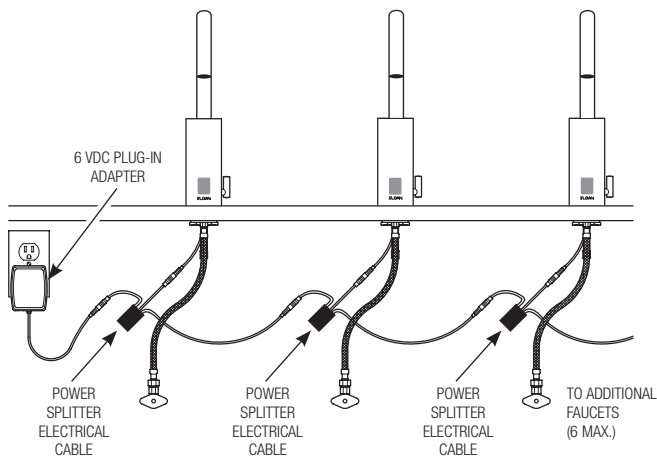

Optima® 77016344 Faucet

TROUBLESHOOTING GUIDE

1. Faucet DOES NOT function.

- A. Adhesive packaging label affixed over sensor eye. Remove adhesive label from sensor eye.
- B. "Intermittent Off" is activated. Press button once.
- C. Water supply stop(s) closed. Open water supply stop(s).
- D. Battery is "dead". Replace battery (refer to Battery Replacement section of guide).

2. Faucet delivers water in an uncontrolled manner.

- A. Reflection. Remove reflective surface.
- B. Faucet is not working properly. Contact Sloan Technical Support.

3. Faucet DOES NOT deliver any water when sensor is activated.

INDICATOR: Solenoid valve produces an audible "CLICK."

- A. Water supply stop(s) closed. Open water supply stop(s).
- B. Water supply stop strainer(s) clogged. Remove, clean, and reinstall water supply stop strainer(s). Replace strainer(s), if required.

INDICATOR: Solenoid valve DOES NOT produce an audible "CLICK."

- A. Power failure. Check power supply.

4. Faucet delivers only a slow flow or dribble when sensor is activated.

- A. Water supply stop(s) are partially closed. Completely open water supply stop(s).
- B. Water supply stop strainer(s) clogged. Remove, clean, and reinstall water supply stop strainer(s). Replace strainer(s), if required.
- C. Spray head is clogged. Remove, clean, and reinstall spray head. Replace spray head, if required.
- D. Faucet is not working properly. Contact Sloan Technical Support.

5. Faucet DOES NOT stop delivering water or continues to drip after user is no longer detected.

- A. Faucet is not working properly. Contact Sloan Technical Support.

6. The water temperature is too hot or too cold on a faucet connected to hot and cold supply lines.

- A. Supply stops are not adjusted properly. Adjust supply stops.

CARE AND CLEANING

DO NOT USE abrasive or chemical cleaners (including chlorine bleach) to clean faucets that may dull the luster and attack the chrome or special decorative finishes. Use **ONLY** mild soap and water, then wipe dry with clean cloth or towel.

While cleaning the bathroom sink, protect the faucet from any splattering of cleaner. Acids and cleaning fluids will discolor or remove chrome plating.



When assistance is required, please contact Sloan Technical Support at: 1-888-SLOAN-14 (1-888-756-2614).