

# Perlator®

## Faucet Aerator - 1.5 gpm

### Flow Restricted Regular Size




flow, stop and go®

#### Features and Benefits

- ▶ Watercolours® design: Color coding to identify flow rate and stream pattern.
- ▶ Patented construction provides a splash-free stream, well-aerated and soft to the touch.
- ▶ Integrated anti-liming honeycomb replaces conventional wire mesh screens prone to lime build up.
- ▶ Anti-clogging dome screen filters sediment and particles.
- ▶ Compatible with regular and vandal proof M22 & M24 metric housings.
- ▶ Available housing finishes: chrome, polished brass, brushed nickel and oil rubbed bronze.
- ▶ Laser marked housings with statutory marks.

#### Certifications

ANSI/NSF®-61-372  
 ASME A112.18.1M and CSA B125  
 Meets **CALGreen** requirements  
 WaterSense

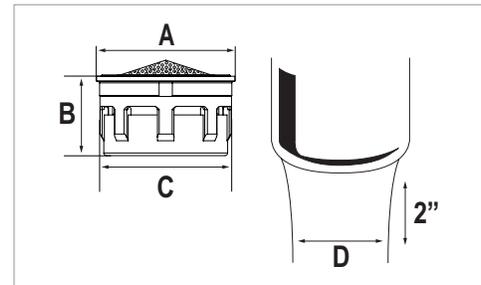

Dimensions		
No	mm	In
A	20.88	.822
B	12.00	.472
C	19.97	.786
D	≈ 13	≈ 1/2


Thread & Part Number		
Part #	Designation	Thread Size
10 635	Insert only	
10 600	Regular male	15/16"-27
10 610	Regular female	55/64"-27
10 620	Regular dual thread	15/16"-27 x 55/64"-27
10 604	Vandal proof regular male	15/16"-27
10 614	Vandal proof regular female	55/64"-27
10 626	Vandal proof regular dual thread	15/16"-27 x 55/64"-27

Other product combinations available.

Packaging:		
Inserts		1 pc (bag), 6 pcs (bag), 50 pcs (bag)
Reg. male/female/dual thread		1 pc (bag), 6 pcs (tube), 50 pcs (tray)
Reg. vandal proof male/female/dual thread		1 pc (bag), 6 pcs (tube), 40 pcs (tray)

Color Code		
Dome	Ring	Basket
Green	Green	Dark Gray

#### Flow Rate Curve

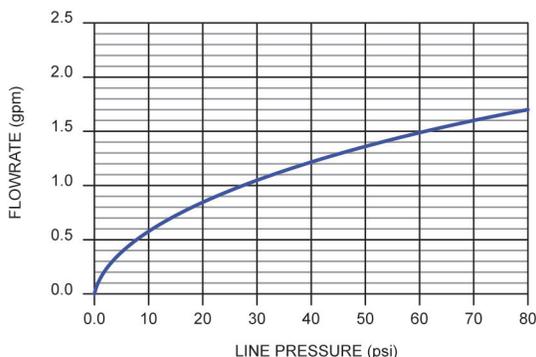

#### Housings



#### Technical Data

Materials: Body Acetal  
 Washer EPDM

Continuous		Short-term (5 minutes max.) Per ASME A112.18.1 testing requirements.	
max. 60 °C	max. 140 °F	max. 70 °C	max. 160 °F
90 psi max.	6.2 bar max.	125 psi max.	8.5 bar max.

NEOPERL, Inc., Waterbury, CT • Tel: 203-756-8437 • Fax: 203-574-2107 • www.neoperl.com

LFFA-17