

PCA® Perlator®

Faucet Aerator - 1.0 gpm max

Pressure Compensating Junior Size

NEOPERL®

flow, stop and go®

Features and Benefits

- Watercolours® design: Color coding to identify flow rate and stream pattern.
- Patented construction provides a splash-free stream, well-aerated and soft to the touch.
- Pressure compensating for constant flow from 20 to 80 psi.
- Integrated anti-liming honeycomb replaces conventional wire mesh screens prone to lime buildup.
- Anti-clogging dome screen filters sediment and particles.
- Available housing finishes: chrome, polished brass and brushed nickel.
- Roll marked with statutory marks or laser for vandal proof housings.

Certifications

ANSI/NSF®-61-372 (11 778 pending)
ASME A112.18.1M and CSA B125 (11 778 pending)
Meets **CALGreen** requirements
WaterSense



Thread & Part Number

Part #	Designation	Thread Size
11 765	Insert only	
11 770	Junior male	13/16"-27
11 780	Junior female	3/4"-27
11 778	Junior dual thread	13/16"-27 x 3/4"-27
11 774	Vandal proof junior male	13/16"-27
11 784	Vandal proof junior female	3/4"-27
11 759	Vandal proof junior dual thread	13/16"-27 x 3/4"-27

Other product combinations available.



Packaging:

Inserts 1 pc (bag), 6 pcs (bag), 50 pcs (bag)
Jr. male/female/dual thread 1 pc (bag), 6 pcs (tube), 50 pcs (tray)
Jr. vandal proof dual thread 1 pc (bag), 6 pcs (clamshell), 50 pcs (tray)
Jr. vandal proof male/female 1 pc (bag), 6 pcs (tubel), 50 pcs (tray)

Color Code

Dome	Flow Regulator	Basket
Natural	Blue	Dark Gray

Flow Rate Curve

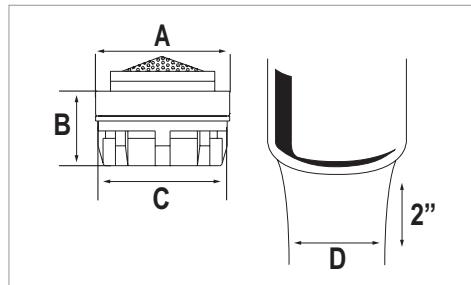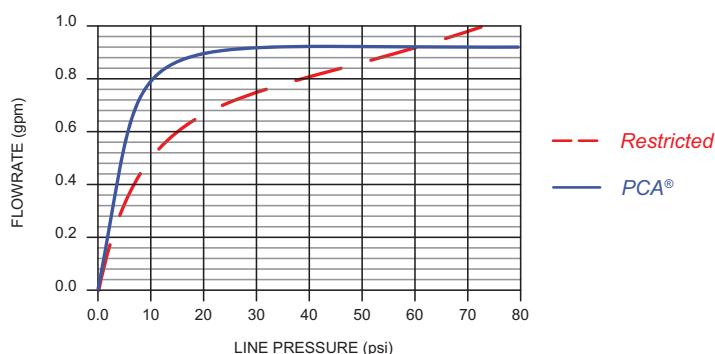

Dimensions

No	mm	In
A	18.20	.717
B	10.21	.402
C	17.40	.685
D	≈ 11	≈ 7/16


Housings



Technical Data

Materials: Body Acetal
O-ring EPDM
Washer EPDM

Continuous



Short-term (5 minutes max.)
Per ASME A112.18.1 testing requirements.

